



Key Specifications/Special Features

- 1.Operation temperature:-20℃ to 60℃, Relative humidity: 85%(30℃), Air pressure: 70-106Kpa.
- 2.With Cat6 keystone modules used for 19" cabinet ,Complete metalation and reed construction, modularization design ;
- 3.IDC: phosphor bronze and silver plating (20-50uinch), suitable diameter 0.4-0.6mm, durability 200 cycles ;
- 4.Contact pin: phosphor bronze and gold plating (20-50uinch), mating durability not less than 750 cycles ;
- 5.Anti-burn performance: plastic part made from PPO and PC or PBT and ABS, meeting the international standard ;
- 6.Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;
- 7.Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;
- 8.The intensity of anti-currency: DC 1,000V (AC,700V), No puncture and flash-over phenomenon in one minute.
Accord with industry standard ;
- 9.Backwave loss: ≥34dB(1≤f < 100MHz)
- 10.Minimum near end cross talk loss 100MHz: ≥43dB(100MHz); Minimum far end cross talk loss 100MHz: ≥35.3dB(100MHz)
- 11.Label:clear label to ensure easy to manage ;
- 12.Type:unshielded
- 13.Standard: designed by international ISO/IEC11801:2002 and TIA/EIA568B.2 ;

Electrical schematic or Electrical schematic
T568A T568B

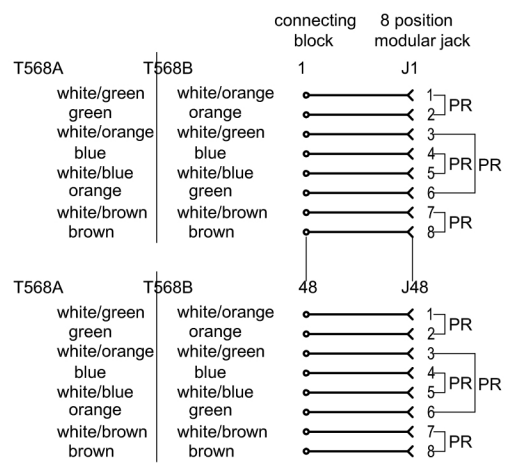

connector universal wiring labels



TITLE:			LEO NETWORK		
	INCH	MM			
.X	.015	.30	TITLE: CAT6 PATCH PANEL		
.XX	.010	.10			
.XXX	.005	.05	P/N: LEOPP-UC6-2548		
DRAWN BY	MA				
CHECK BY	SCALE	1:1		REV	
	UNIT	MM			
APPD BY	SHEET	1/1	DWG NO:		
	DATE	2017/04/05			