
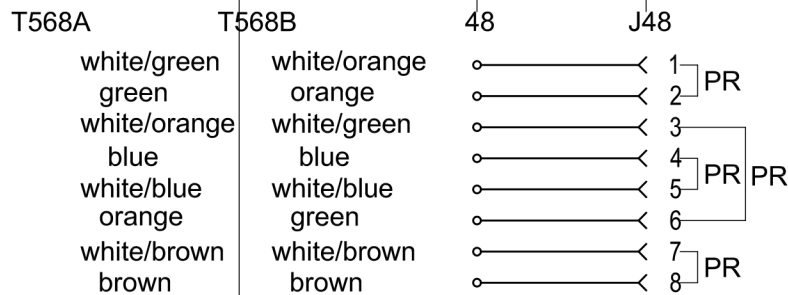


Electrical schematic or Electrical schematic
T568A or T568B

connecting 8 position
block modular jack

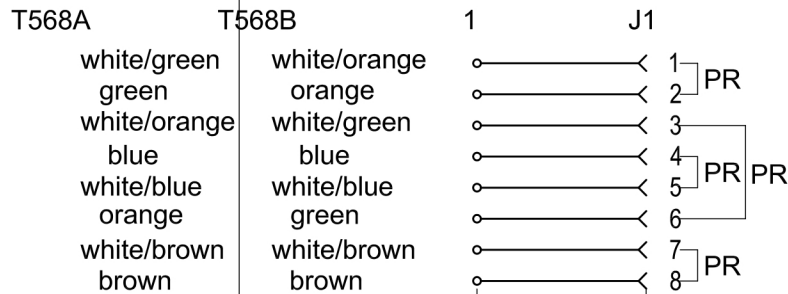

Key Specifications/Special Features

1. Operation temperature: -20 °C to 60 °C, Relative humidity: 85%(30 °C), Air pressure: 70-106Kpa.
2. With Cat6 keystone modules used for 19" cabinet, Complete metalation and reed construction, modularization design ;
3. IDC: phosphor bronze and silver plating (20-50uinch), suitable diameter 0.4-0.6mm, durability 200 cycles ;
4. Contact pin: phosphor bronze and gold plating (20-50uinch), mating durability not less than 750 cycles ;
5. Anti-burn performance: plastic part made from PPO and PC or PBT and ABS, meeting the international standard ;
6. Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;
7. Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;
8. The intensity of anti-currency: DC 1,000V (AC,700V), No puncture and flash-over phenomenon in one minute. Accord with industry standard ;
9. Label: clear label to ensure easy to manage ;
10. Type: unshielded
11. Standard: designed by international ISO/IEC11801 and TIA/EIA568B.2 ;

TITLE:			LEO NETWORK		
	INCH	MM			
.X	.015	.30	TITLE: 24 port patch panel		
.XX	.010	.10			
.XXX	.005	.05	P/N: LEOPP-UC6-6224		
DRAWN BY	MA		SCALE	1:1	REV
CHECK BY			UNIT	MM	
APPD BY			SHEET	1/1	DWG NO:
			DATE	2017/04/05	